




STANDARD CONSTRUCTION DRAWINGS


- ① PROVIDE CONTRACTION JOINT IF WIDTH OF DRIVEWAY IS EQUAL TO OR GREATER THAN 18'
- ② EXPANSION JOINT
- ③ ITEM 452 NON-REINFORCED CONCRETE PAVEMENT
7" RESIDENTIAL WITHIN APRON LIMITS
9" COMMERCIAL WITHIN APRON LIMITS
5" -ALL AREAS OUTSIDE OF APRON
- ④ ITEM 204 COMPACTED SUBGRADE

NOTES:

PAY UNIT PRICE BID FOR ITEM 452, CONCRETE APRON AS PER PLAN SHALL INCLUDE ALL ABOVE ITEMS UNLESS NOTED OTHERWISE.

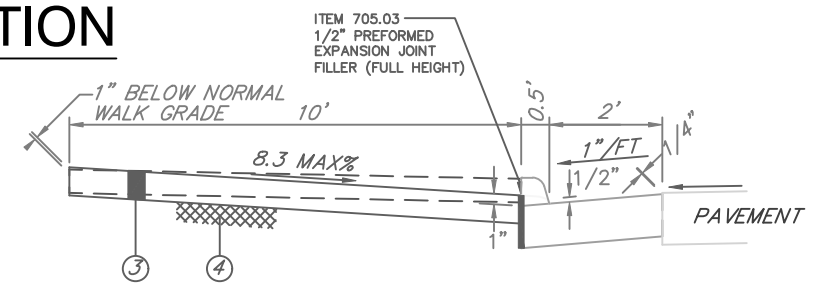

SECTION A-A

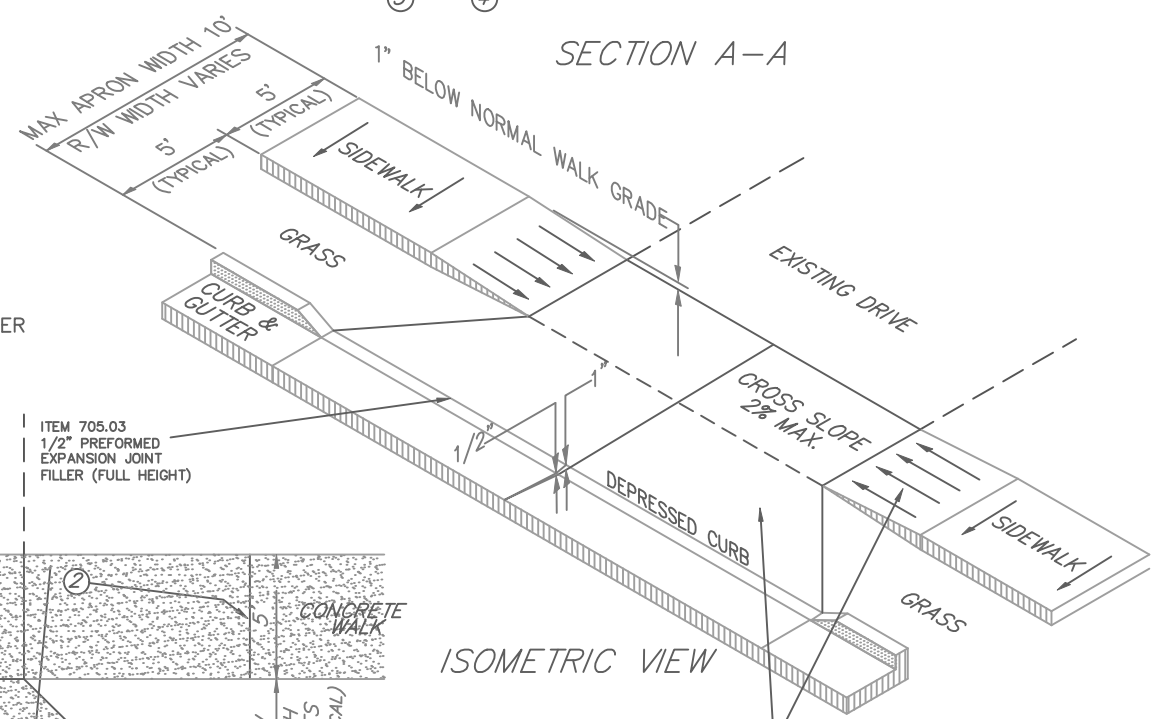


ISOMETRIC VIEW

CROSS SLOPE 8.3% MAX.
RECOMMENDED 7.1% MAX.

NOTES:

APRON CANNOT BE WITHIN 5' OF EXISTING STRUCTURE (HYDRANT, CATCH BASIN, TREE, UTILITY POLE, ETC.)

IF WIDENING EXISTING DRIVEWAY, SIDEWALK IS REQUIRED TO BE THICKNESS OF THE APRON AND REPLACED TO THE CLOSEST JOINT.

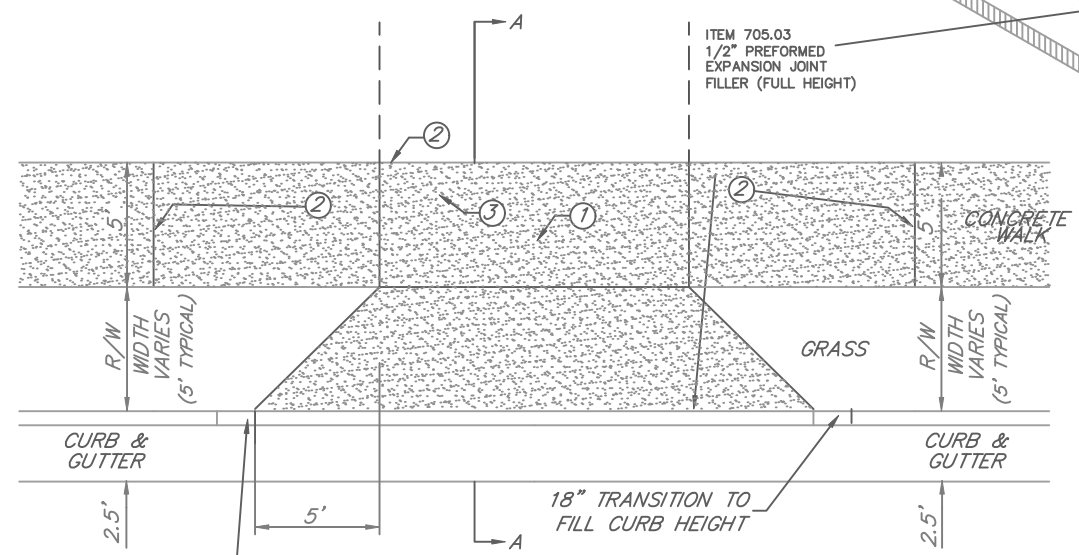

DRIVE PLAN

DRIVE APRON DETAIL

18" TRANSITION TO FILL CURB HEIGHT